




Pressure Calibrator Kit (Pneumatic) APCK Series Advanced Model



Pneumatic
Hand Pump
HP 40

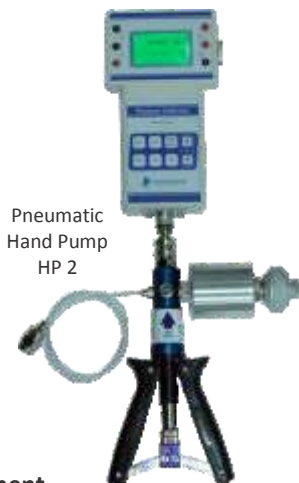

Pneumatic
Hand Pump
HP 2



Carrying Case

Application: Ideal for calibration of vacuum and pressure gauges, switches, transmitters, etc.

Features

MEASUREMENTS: Loop powered supply with mA measurement for Transmitter calibration . Electrical measurements of mA & Volts . Peak pressure measurements (High & Low peak)

PRESSURE SWITCH TEST FACILITY: Opening and closing pressures are easily identified by display hold while opening and closing contact

DISPLAY: Large backlit Graphical display . 'Auto OFF' function for longer battery life

KEYPAD: Feather Touch keypad for easy operation . Dedicated ZERO key for Zeroing before test

PUMP: Pneumatic hand pump for Pressure & Vacuum

Over Pressure Alarm	: 20% of Full Scale
Pressure Media	: Compatible to 316 Stainless Steel
Current Terminal Input	
Protection	: Fuse: 100mA / 250V
Display	: Graphical display
Backlight	: LED Backlight
Power Supply	: Li-ion Rechargeable Battery
Low Battery Indicator	: Yes
Auto Power Off	: 15 minutes
Battery Backup	: 19 hours
Transmitter Supply	: 24V DC \pm 10% (Loop Powered)
Pressure Connection	: 1/4" BSP Female
Operating Temperature:	10 to 50°C
Instrument Casing	: ABS Plastic
Instrument Dimensions:	250 mm x 145 mm x 45 mm (LxWxD)
Instrument Weight	: 650 gms

Instrument

Model	Range*	Resolution	Accuracy ¹	Selectable Pressure Units
APCK 2	-1 bar Vacuum to 2 bar	0.0001 bar	$\pm 0.025\%$ F.S.	bar, kg/cm ² , MPa, mH ₂ O, atm, psi, inHg, ftH ₂ O, kPa, inH ₂ O, mmHg, mbar, cmH ₂ O, mmH ₂ O
APCK 10	-1 bar Vacuum to 10 bar	0.001 bar		bar, kg/cm ² , MPa, mH ₂ O, atm, psi, inHg, ftH ₂ O, kPa, inH ₂ O, mmHg, mbar, cmH ₂ O
APCK 20	-1 bar Vacuum to 20 bar	0.001 bar		bar, kg/cm ² , MPa, mH ₂ O, atm, psi, inHg, ftH ₂ O, kPa, inH ₂ O, mmHg, mbar, cmH ₂ O
APCK 40	-1 bar Vacuum to 40 bar	0.001 bar		bar, kg/cm ² , MPa, mH ₂ O, atm, psi, inHg, ftH ₂ O, kPa, inH ₂ O, mmHg, mbar, cmH ₂ O

*Contact us for other ranges.

Specifications for Pneumatic Hand Pump HP2

Range: Generation of Pressure: 2 Bar & Vacuum: 0.950 Bar
Medium: Dry Air. **End Connection:** 1/4" BSP (F) Test & Master

Specifications for Pneumatic Hand Pump HP 40

Range: Generation of Pressure: 40 Bar & Vacuum: 0.950 Bar
Medium: Dry Air. **End Connection:** 1/4" BSP (F) Test & Master

Measurements

Facility	Range	Resolution	Accuracy ¹
mA ²	0 to 50 mA	0.001 mA	$\pm 0.025\%$ of Reading + 10 μ A
Volts	0 to 30 V	0.001 V	$\pm 0.025\%$ of Reading + 3 mV

Note 1: Accuracy specifications include effect of non-linearity, hysteresis and repeatability at 23 \pm 5°C. Note 2: Active loop - Load @ 800 Ω

Standard Delivery

- Instrument: 1 no.
- Pneumatic Hand Pump: 1 no.
- Carrying Case: 1 no.
- Test Lead (2 wire): 2 nos.
- Charger: 1 no.
- Adapters (each 1 no.): 1/4" BSP (M) x 1/8" BSP (F), 1/8" NPT (F), 1/4" NPT (F), 3/8" BSP (F), 3/8" NPT (F), 1/2" BSP (F), 1/2" NPT (F), 1/4" BSP (M)
- Nylon Seals: 1/8", 1/2", 1/4" & 3/8" - 5 nos. each
- Swivel Adapter with 'O' Ring - 1 no.
- User Manual: 1 no.
- Traceable Calibration Certificate

Optional

- RS232 with RnD Cal-P Software
- Accredited (NABL) Calibration Certificate as per ISO/IEC 17025 Standard

Manufacturer of
**TEST BENCHES
CALIBRATION INSTRUMENTS**

**ISO 9001
Certified Company**

www.rndinstruments.com

Contact

5, Natesan Nagar, Alapakkam,
Chennai 600116. Tamilnadu, INDIA.
Tel.: +91-44-4283 9039 / 4284 1119
Mobile Nos.: +91-7358393981 / 7358393984
email: sales@rndinstruments.com
quote@rndinstruments.com

ACCREDITED CALIBRATION LABORATORY

As per ISO / IEC 17025

**THERMAL
MECHANICAL
ELECTROMECHANICAL**

www.calibrationlab.in